



MATERIALS:

Modules 26 gauge steel sheet. Rolled and stamped necks, galvanized metal sheet 26 gauge. Fiberglass insulation R-6 or R-8.

FINISH:

Baked electrostatic paint (polyester) white
Vermont as standard finish and sealed plastic packaging.


DT Aluminum DTA Steel

DESCRIPTION:

Diffuser in aluminum or steel, high efficiency, for false ceiling mounted 24 "x 24" (nominal) has 3 modules with standard 4-way distribution.

Round neck for connection to flexible conduit in diameters from 4 "to 16" in increments of 2" fiberglass insulation.

Excellent performance in systems of variable air volume.

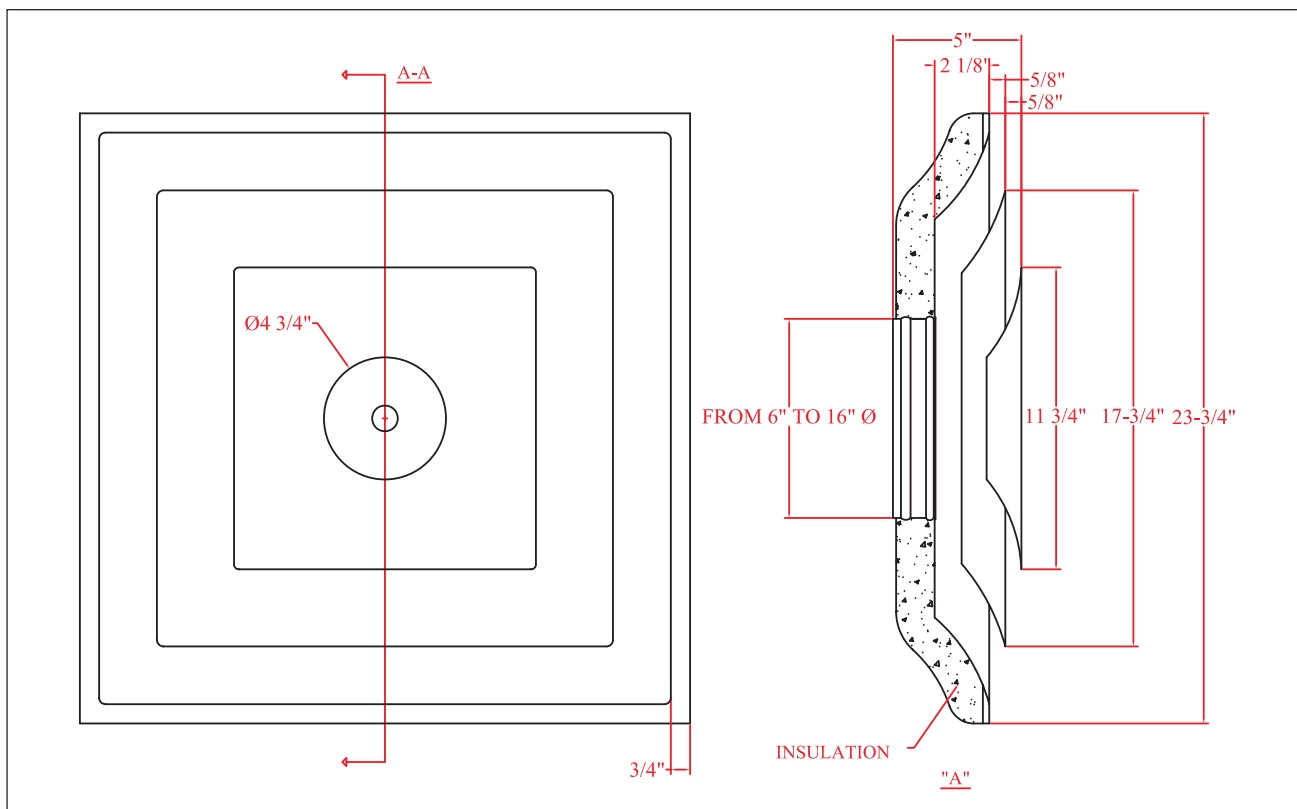

AIR DISTRIBUTION PRODUCTS

SPIRO DUCT + FITTINGS + GRILLES + DIFFUSERS + FILTERS + FLEXIBLE DUCT + ACCESSORIES

Verbet reserve the right of making any change without any prior notice.